


# MARINE SURVEY KIT with Cable

www.buckleysinternational.com



The Marine Survey Kit comprises a Weighted Silver/Silver Chloride Half Cell, plastic cable spool and an accurate multimeter.

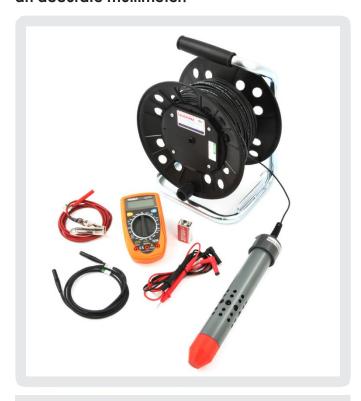

The kit has been specially created to include all items required to easily carry out a corrosion survey of marine structures.

The half cell is housed in a PVC body with holes to allow the easy flow of water around the cell. The half cell is weighted to help keep it in position.

The cell is connected to the cable spool by 75m or 100m of CSP 55/015 cable. Two other leads are supplied to connect the spool and the structure to the accurate multimeter.

In use the multimeter is connected to the structure (+ terminal) and the cable spool (-terminal). The half cell is then lowered into the sea at the desired position. Turning on the multimeter to the DC voltage range will display the corrosion voltage.

The kit can be tailored to suit specific customer's requirements.

K-SAT Reference

Cells

6004-0111

**UCP1A** Contact

Probe

6004-0039

BathyCorrometer®

Calibration Kit

6004-0031

**UCP1B** Proximity

Probe

6004-0043

#### KIT COMPRISES

- Weighted silver/silver chloride half cell
- 75m length cable (6004-0044)
- 150m length cable (6004-0093)

**ANCILLARY PRODUCTS AVAILABLE:** 

- Two leads for connecting with spool and multimeter
- Cable spool

BathyCorrometer®

Pro'

6004-0078

Marine Reference

Cell with 12.5m Cable

6004-0026

Multimeter

#### **FEATURES**

- 75m or 150m cable length
- Inert body casing: PVC
- Lightweight
- · Long service life
- Supplied with Certificate of Inspection and Conformity

### **TECHNICAL SPECIFICATIONS**

### **Half Cell**

- Size: 140mm long x 25mm diam.
- Temperature coeff: -0.6mV per/°C
- Temperature range: 0 30 °C
- Working life: 1 to 5 years
- Output: +54mV @ 25°C to K-SAT reference cell

#### Multimeter

- 3½ Digit
- DC, AC, voltage & current ranges
- DC accuracy: +/- 0.5%
- AC accuracy: +/- 0.8%
- Plus Ohm & Hz ranges

Packed weight (complete kit): 3.5Kg

Dimensions (packed): 36cm x 36cm x 36cm

**Note:** Due to ongoing technical developments, all stated information is typical and is subject to change without notice or obligation.

# AFTER SALES SERVICE / TECHNICAL SUPPORT

All Buckleys products are manufactured under the controls established by a quality management system that meets the requirements of BS EN ISO 9001:2015 and are supplied with a one year 'back-to-base' warranty. The equipment is proven to be robust and reliable and will give years of service if maintained in accordance with our instructions.

Buckleys provide full repair and calibration facilities; offering a fast turn-around service for customers' equipment.

contact details below.

Advice on specific applications for all Buckleys products is available from our technical department. Contact us by telephone or e-mail using the

## **Buckleys (UVRAL) Ltd. -**